

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 319 865 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
18.06.2003 Bulletin 2003/25

(51) Int Cl.7: **F16G 13/16**

(21) Application number: **02025995.8**

(22) Date of filing: **21.11.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Komiya, Shoichiro**
1-61 Shiromi 2-chome, Chuo-ku, Osaka (JP)

(74) Representative: **Maisch, Thomas, Dr. rer. nat.
Ullrich & Naumann,
Patent- und Rechtsanwälte,
Luisenstrasse 14
69115 Heidelberg (DE)**

(30) Priority: **11.12.2001 JP 2001377830**


(71) Applicant: **Tsubakimoto Chain Co.
Osaka-shi, Osaka (JP)**

(54) **Closed cable drag chain**

(57) To provide a closed cable drag chain, which is capable of preventing the contact wear powder generated in holding and guiding the cable or the like from being scattered by reliably closing the cable or the like, and wherein the assembling, maintenance and repair are easy while having light weight and low noise. In a closed cable drag chain into which a cable or the like is inserted to be held and guided in conditions where a number of intermediate frames 10 are articulately connected to each other, an outer frame 20 including a removable opening/closing frame structure fit-covers a

coupling portion of the adjacent intermediate frames 10 to close the coupling gaps S respectively thereby coupling it in a tubular shape, the intermediate frame 10 comprises an intermediate frame body and an opening/closing lid member 12 fitted into the intermediate frame body 11, and the intermediate frame body 11 includes lower open end surfaces 11b, which abut with each other on the chain bend inner peripheral side to hold a required bending position of the chain and upper open end surfaces 11c, which abut with each other on the chain bend outer peripheral side to hold a straight extended position of the chain.

Fig.1

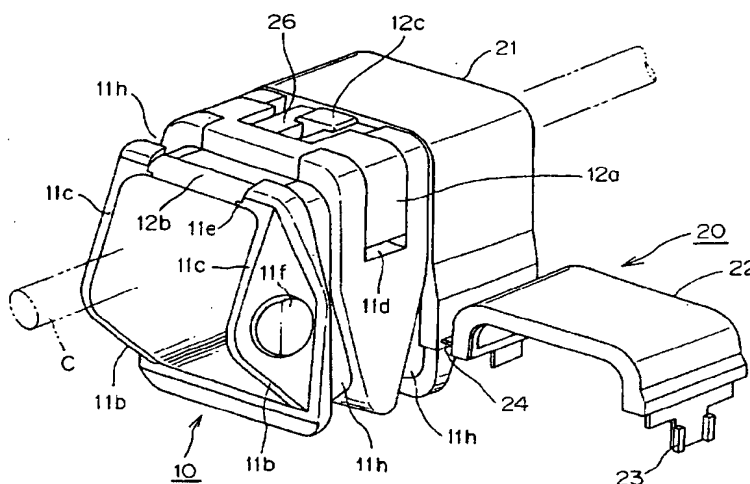

Description

Field of the Invention

[0001] The present invention relates to a technical field of a cable drag chain, which holds and guides an electric cable or a hydraulic or pneumatic hose between a mobile portion where a machine tool, a civil engineering machinery, a transfer system or the like is moved and a fixed portion.

Related Art

[0002] When a cable or a hydraulic or pneumatic hose is connected to a mobile device such as a machine tool, a civil engineering machinery, a transfer system or the like, undue torsion or tension is generated in the cable or hose by its movement thereby damaging a cable or a hose and disordering its outward appearance. Therefore, a cable drag chain for holding and guiding the cable or hose has been proposed.

[0003] A support device for a cable or a hose, which was proposed in Japanese Examined Patent Publication No. Sho. 62-15008 for example, includes a plastic small-diameter tube member provided with a fan-shaped groove in upward and downward directions of an outer peripheral surface of its side, inside the support device, and also includes a half body of the tube member made of a metallic sheet up and down respectively on the inside the support device, and the halves of the tube members are attached to each other with a pin in such a manner that said small diameter tube member is sandwiched by the halves of the tube members from the upper and lower portions. Then by engaging the inner groove in the small diameter tube member and a stopper of the upper and lower halves of the tube members the support device has a structure connected in the longitudinal direction of the support device.

[0004] A cable drag chain "A" disclosed in the specification of Japanese Patent Application No. 2000-278471 previously filed by the present inventor includes a pair of connector pins A34 and pin hole portions A35 at a front end portion A32 and a rear end portion A33 in a plurality of tubular intermediate frames A3 respectively as shown in FIGS. 4 and 5. Then, the end surface of each of the front and rear end portions A32 and A33 is formed as a stopper surface, which limits a bending angle, and the connector pin portion A34 and the pin hole portion A35 of the adjacent intermediate frame A3 are engaged to each other thereby connecting a plurality of intermediate frames A3. At the same time an outer periphery of the connected portion of the adjacent intermediate frame A3 is covered with a detachable tubular outer frame A4 to close a gap between the adjacent intermediate frames A3.

Problems to be solved by the Invention

[0005] However, when the pin for engagement in the former support device for the cable or hose is removed, the upper and lower tube member halves and the small diameter tube member are taken apart in pieces and they are disconnected at the disassembled portion. Thus, assembling them to the original structure is troublesome. Further, there are problems that after the upper and lower tube member halves and the small diameter member are assembled once, it takes much time to disassemble them and when they are assembled again, a pin must be replaced with a new one, thereby increasing the cost and becoming inconvenient for maintenance.

[0006] Further, there are problems that since the upper and lower tubular member halves are made of a metallic material and the small tube member are molded of a synthetic resin, the metallic material shaves the synthetic resin during sliding and a large amount of wear powder is produced. Further, since the metallic material is used the holding device becomes heavier than that molded of only a synthetic resin. Additionally since a portion of a metallic material and a portion of a synthetic resin collide with each other during moving the support device, a high noise is generated. Furthermore, since the upper and lower tube member halves on the outermost periphery is made of metal the noise that the upper frame hits a floor surface during the movement of the device becomes higher.

[0007] On the other hand, in the latter cable drag chain A an intermediate frame A3 is formed by a thick hollow rectangular tube body of a synthetic resin and there is a troublesome problem that the cable or the hose cannot be inserted during maintenance and repair as shown in FIG. 5(a). Further, as shown in FIG. 5(b) a thin tongue piece A47 provided on the outer frame A4 is engaged in a groove portion A36 provided on the outer peripheral surface of the intermediate frame A3 to close the gap of the connecting portion. However, the thin tongue piece A47 makes the contact conditions with the intermediate frame A3 insufficient and the sealing degree cannot be exerted sufficiently.

[0008] Therefore, the objects of the present invention is to solve the above-mentioned problems and to provide a closed cable drag chain, which is capable of preventing the contact wear powder generated in the holding and guiding the cable or the like from being scattered by reliably closing the cable or the like, and wherein the assembling, maintenance and repair are easy while having light weight and low noise.

Means for Solving the Problems

[0009] To solve the above-mentioned problems a closed cable drag chain according to claim 1, into which a cable or the like is inserted to be held and guided in conditions where a number of intermediate frames are

articulately connected to each other, an outer frame including a removable opening/closing frame structure fits over a coupled portion of the adjacent intermediate frames to close the coupling gaps respectively thereby engaging it in a tubular shape is characterized in that said intermediate frame comprises an intermediate frame body in which a cable holding groove was provided and an opening/closing lid member fitted into said cable holding groove, and said intermediate frame body includes lower open end surfaces, which abut with each other on the chain bend inner peripheral side to hold a required bending position of the chain and upper open end surfaces, which abut with each other on the chain bend outer peripheral side to hold a straightly extended position of the chain.

[0010] A closed cable drag chain according to claim 2 further solves the above-mentioned problems by the fact that an elastic sealed portion, which closely fits said outer frame and said intermediate frame are formed on the inside of the front end and the inside of the rear end of the outer frame in addition to the configuration of claim 1.

[0011] Further, a closed cable drag chain according to claims 3 and 4 further solves the above-mentioned problems by the fact that said outer frame is relatively movably connected to said opening/closing lid member while including an engagement piece, which is movably engaged in an engagement portion protruded on the opening/closing lid member in the coupling direction of the chain in addition to the configuration according to claim 1 or 2.

[0012] Further, a closed cable drag chain according to claims 5, 6, 7 and 8 further solves the above-mentioned problems by the fact that said intermediate frame and outer frame are formed of a synthetic resin in addition to the configuration according to claims 1 to 4.

[0013] Here the intermediate frame used in the present invention comprises an intermediate frame body in which a cable holding groove is provided and an opening/closing lid member, which is fitted into said cable holding groove. If the intermediate frames form a tubular coupling structure in which they were articulately connected to each other and has a form in which a cable or the like is inserted and can be held and guided, any annular forms having cross-sections such as a circular cross-section, an oval cross-section, a rectangular cross-section and the like may be used.

[0014] Further a number of intermediate frames in the present invention may be used if they are articulately connected to each other in a coupling structure. As the concrete connection structures a connecting structure in which connecting pin portions of the adjacent frames and the pin hole portions of the adjacent intermediate frames were fitted to each other, a connecting structure in which the pin hole portions of the adjacent intermediate frames were connected to a connecting pin of another part or the like can be adopted.

[0015] On the other hand, if the opening/closing frame

structure of said outer frame can be removed from the coupling portion of the adjacent intermediate frames, any of the opening/closing frame structures, which can be split or opened/closed up and down or left and right, may be used. Further, if an opening/closing mechanism including a snap locking portion on one hand and including a hinge portion on the other hand is adopted, a simple opening/closing operation can be attained.

[0016] Further, if the elastic sealed portion formed inside the front end and inside the rear end of said outer frame can closely fit the outer frame and the intermediate frame, even a sealing form integrally molded by a multi-components injection molding process may be used and a sealing form in which an elastic sealing member was adhered with adhesive or the like may also be used.

[0017] If the engagement structure of the engagement piece formed on said outer frame and the engagement portion protruded on the opening/closing lid member is a structure that can relatively movably connect the outer frame to the opening/closing lid member, any engagement structure may be used. Even if, for example, said engagement structure is one in which the engagement portion is formed of a stopping projection and an engagement hole, which is movably engaged with this stopping projection in the coupling direction, is provided in an engagement piece, it may be used.

[0018] If the materials of the intermediate frame and the outer frame are synthetic resin, any material may be used. Nevertheless, synthetic resins such as acryl so called as engineering plastics having excellent wear resistance and lubricating properties, polycarbonate, nylon 6, nylon 66, nylon 46, all aromatic nylons and the like are preferably used. Further, when strength is required, fiber reinforced plastics is preferred.

Action

[0019] When a mobile machine such as a machine tool, an electronic device, a civil engineering machinery, a transfer system or the like, or a cable or the like such as an electric cable, which performs electrical supply, liquid supply or the like to a mobile portion of a machine, a hydraulic or pneumatic hose or the like is moved together with the mobile portion, the closed cable drag chain according to the present invention sequentially causes portions exhibiting required bending positions of a number of adjacent intermediate frames coupled in a tubular shape to sequentially displace in accordance with the mobile positions of mobile portions while lower open end surfaces formed on the intermediate frame bodies of the intermediate frames abut on each other on a chain bend inner peripheral side thereby ensuring a required bending radius, whereby the cable or the like can be moved together with the mobile portion of the machine while being held and guided.

[0020] Further, upper open end surfaces formed on the intermediate frame bodies of the intermediate

frames abut on each other on a chain bend outer peripheral side at mobile positions where said adjacent intermediate frames do not require a required bending position, whereby the drag chain allows the cable or the like to be inserted and held while maintaining a straightly extended position.

[0021] A better understanding of the invention will be had when reference is made to the Brief Description of the Drawings, Description of the Invention and Claims which follow hereinbelow.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

FIG. 1 is an enlarged perspective view of a configuration unit of a closed cable drag chain, which is an Example of the present invention.

FIG. 2 is a disassembled view of the configuration unit shown in FIG. 1.

FIG. 3 is a side view of a closed cable drag chain in which a plurality of the configuration units shown in FIG. 1 was coupled with each other.

FIG. 4 is a side view showing a conventional cable drag chain.

FIG. 5 is a view of components of the cable drag chain shown in FIG. 4, and particularly, (a) is a perspective view of an intermediate frame and (b) is a perspective view of an outer frame.

[0023] A better understanding of the invention will be had when reference is made to the Description of the Invention and Claims which follow hereinbelow.

DESCRIPTION OF THE INVENTION

Description of Reference Numerals

[0024]

10 ...	Intermediate frame
11 ...	Intermediate frame body
11a ...	Cable holding groove
11b ...	Lower open end surface
11c ...	Upper open end surface
11d ...	Side wall engagement portion
11e ...	Step portion
11f ...	Connecting pin portion
11g ...	Pin hole portion
11h ...	Fitting groove
12 ...	Opening/closing lid member
12a ...	Locking arm
12b ...	Bend limiting end portion
12c ...	Engagement portion
20 ...	Outer frame
21 ...	Upper outer frame
22 ...	Lower outer frame

23 ...	Snap locking portion
24 ...	Hinge portion
25 ...	Elastic sealed portion
26 ...	Engagement piece
26a ...	Engagement hole
C ...	Cable or the like
S ...	Coupling gap

Embodiments of the Invention

10

[0025] One Example of a closed cable drag chain preferable as the present invention will be described with reference to FIGS. 1 and 3. FIG. 1 is an enlarged perspective view of a configuration unit of a closed cable drag chain, which is one Example of the present invention, FIG. 2 is a disassembled view of the configuration unit shown in FIG. 1 and FIG. 3 is a side view of a closed cable drag chain formed by connecting the configuration units shown in FIG. 1 to each other.

15

20

[0026] The closed cable drag chain of the present Example is formed by connecting a number of configuration units to each other as shown in FIGS. 1 and 2 to a tubular form. More specifically, as shown in FIG. 3, a number of intermediate frames 10 made of a synthetic resin are articulately connected to each other to form a coupled tube and by fit-covering a coupling portion between the intermediate frames with an outer frame 20 made of a synthetic resin to close coupling gaps S respectively a basic structure in which the cable or the like C are inserted, held and guided is included.

25

30

35

[0027] Thus the intermediate frame 10 of the synthetic resin of the present Example comprises an intermediate frame body 11 in which a cable holding groove 11a for inserting the cable or the like C therein was provided and an opening/closing lid member 12 which is fitted into the cable holding groove 11a as shown in FIG. 2. The frame form is an annular form having a rectangular cross-section.

40

45

50

55

[0028] Further, the intermediate body 11 includes a lower open end surface 11b which holds a required bent position by abutting therewith on a bent inner peripheral side of the chain and an upper open end surface 11c which holds a straightly extended position by abutting therewith on a bent outer peripheral side of the chain.

[0029] The opening/closing lid member 12, which is fitted into said cable holding groove 11a, is elastically engaged in opposite side wall engagement portions 11d and 11d by reversed- U-shaped locking arms 12a and 12a extending on both sides and exerting spring plate effects inwardly, and is fitted in opposed step portions 11e each provided on the upper end of the cable holding groove 11a so that the flowing out of contact wear powder generated within the cable holding groove 11a from the coupling portion is prevented.

[0030] Further, said opening/closing lid member 12 includes a bend-limiting portion 12b, which abuts on a chain on the chain bending outer peripheral side as well as the upper open end surface 11c formed on the inter-

mediate body 11 of the intermediate frame 10 to help-
fully limit the bending of the chain so that it can maintain
the straight extended position, at a mobile position
where a required bending position is not needed.

[0031] Further, said intermediate frames 10 can be artic-
ulately connected to each other to be coupled to a tub-
ular structure by adopting a connected structure
wherein connector pin portions 11f protruded on the in-
termediate frame body 11 and the adjacent pin hole por-
tions 11g bored in the intermediate frame body 11 are
fitted to each other, whereby assembling and disassem-
bling a drag chain can be easily performed without using
another part of the connector pin. However, a connected
structure in which the adjacent pin hole portions bored
in the intermediate frame portions 11 were reliably con-
nected to each other with another part of a connecting
pin may be adopted.

[0032] The outer periphery of said intermediate frame
10 is provided with fitting grooves 11h, which are fitted
to and covered by the outer frame 20 at coupling por-
tions between adjacent intermediate frames 10 to close
the coupling gaps S respectively.

[0033] On the other hand, an outer frame 20 made of
a synthetic resin of the present Example includes an
opening/closing frame structure comprising an upper
side outer frame 21 and a lower side outer frame 22,
both of which can be disassembled from a coupling por-
tion between the adjacent intermediate frames 10, and
adopts a integral piece type frame which is split to open
in the up and down directions at a snap locking portion
23 provided on one end, where these upper side outer
frame 21 and lower side outer frame 22 are connected
to each other, and at a hinge portion 24 provided on the
other end.

[0034] It is noted that as the outer frame 20 of a syn-
thetic resin of the present Example an integral type outer
frame which can be split to open itself left and right by
including an opening/closing structure comprising a
right outer frame and a left outer frame may be adopted.

[0035] An elastic sealed portion 25 is formed by ad-
hering an elastic sealing material to the inside of the
front end of said outer frame 20 and the inside of the
rear end thereof so that the closed fitting of the interme-
diate frame 10 can be performed even in any bent con-
ditions and the sealing degree between the intermediate
frame 10 and the outer frame 20 is improved. Thus, the
diffusion of dust such as contact wear powder generated
on holding and guiding the cable or the like C is reliably
blocked and sliding noise and contact noise, which are
likely to occur between the intermediate frame 10 and
the outer frame 20, are absorbed.

[0036] Although in the present Example said elastic
sealed portions 25 are provided on the inside of the front
end and the inside of the rear end of the outer frame 20,
if the elastic sealed portions 25 are extended between
the inside of the front end and the outside of the front
end of the outer frame 20 and between the inside of the
rear end and the outside of the rear end of the outer

frame 20, respectively, the sealing degree between the
intermediate frame 10 and the outer frame 20 is further
improved whereby the above-mentioned diffusion of the
dust and sliding noise and the like can be more efficient-
ly removed. Further, if the outer frame 20 is produced in
a slightly smaller size than a size of the outward form of
the intermediate frame, the sealing degree can be im-
proved by the use of elastic deformation of the synthetic
resin and the collision speed of the adjacent interme-
diate frames 10 is reduced to lower the collision noise by
sliding resistance between the synthetic resins gener-
ated on bending of the intermediate frame 10.

[0037] Further, a tongue-shaped engagement piece
26 having a bored engagement hole 26a is provided in
said outer frame 20 so that it is movably engaged in the
opening/closing lid member 12 in an engagement direc-
tion of the engagement piece 26. Further, the engage-
ment hole 26a of the engagement piece 26 is relatively
movably connected to an engagement portion 12c com-
prising a stopping protrusion protruded on the opening/
closing member 12.

[0038] As described above, the sliding resistance
generated on the intermediate frame body 11 reduces
the collision speed of the adjacent intermediate frame
bodies 11 whereby these collision noises can be low-
ered. Additionally, the engagement piece 26 of the outer
frame 20 is integrally connected to the engagement por-
tion 12c of the opening/closing member 12. Thus, when
the opening/closing member 12 is removed from the in-
termediate frame body 11, even if an upper outer frame
21 of the upper frame 20 and a lower outer frame thereof
are being opened, the parts loss of the outer frame 10
and the opening/closing member 12 can be prevented
during the maintenance by the integral form of the outer
frame 20 and the opening/closing member 12 of the in-
termediate frame 10.

[0039] Next, the basic chain operation of the closed
cable drag chain according to the present Example is
as follows.

[0040] When a mobile portion in a machine tool as
well as a cable or the like such as a cable, a hydraulic
hose or the like are moved, the position exhibiting a re-
quired bending position of a number of intermediate
frames engaged in a tubular shape is sequentially dis-
placed in accordance with the movement position of the
moving portion while the lower open end surfaces 11b
provided on the intermediate frame body 11 of the inter-
mediate frame 10 mutually ensure a required bending
radius, whereby the cable or the like C as well as the
moving portion of the machine tool can be moved while
being held and guided in the closed cable drag chain of
the present Example.

[0041] Further, the upper opened end portion 11c
formed in the intermediate frame body 11 of the inter-
mediate frame 10 and the bend limiting end portion 12b
of the opening/closing lid member 12 inserts the cable
or the like C to hold it while abutting with the chain on
the respective chain bending outer peripheral side and

maintaining the straight extended position at a moving position where the adjacent frames 10 do not require a required bending position.

[0042] The thus obtained closed cable drag chain of the present Example can remove the intermediate frame 20 and open/close the opening/closing lid member 12 without disassembling the engagement of the adjacent intermediate frames 10 by including the above-mentioned chain structure. Thus, the assembling of the chain in inserting a cable or the like C in the chain and maintenance and repair not only become easy but also the diffusion of the contact wear powder, which is likely to occur in holding and guiding the cable or the like C can be reliably prevented and the sliding noise and contact noise, which are generated between members, and the collision noise, which is generated between the adjacent intermediate bodies 11, as well as the hitting noise, which is generated in hitting the moving surface of the cable can be removed. Furthermore, weight reduction of the chain and cost reduction can be realized resulting in significant effects.

[0043] It is of course that the present invention is not limited to the above-described Examples if the features of the present invention are not lost, and for example, the intermediate frame 10 and the outer frame 20 may use any forms other than those described above.

Effects of the Invention

[0044] As described above, according to the closed cable drag chain according to claim 1, the intermediate frame comprises an intermediate frame body in which a cable holding groove was provided and an opening/closing lid member fitted into said cable holding groove, and the outer frame includes an opening/closing frame structure removable from the coupling portion of the adjacent intermediate frames. Thus, the opening/closing lid member can be freely opened/closed at an upper position of the intermediate frame body without simultaneously operating the coupling of the adjacent intermediate frames and the mounting/dismounting of the outer frame unlike conventional cases. Therefore, even after the drag chain was attached to a mobile machine such as a machine tool, an electronic device, a civil engineering machinery, a transfer system or the like, a cable or the like can be easily inserted into the drag chain to assemble it. As a result the cable or the like in a cable holding groove can be easily checked and repaired during its maintenance.

[0045] Further, according to the invention of claim 1, the intermediate frame includes lower open end surfaces, which abut with each other on the chain bend inner peripheral side to hold a required bending position of the chain and upper open end surface, which abut with each other on the chain bend outer peripheral side to hold a straightly extended position of the chain. Thus, when a cable or the like is caused to move together with a mobile portion of a machine, lower open end surfaces of

the intermediate frame body sequentially displace a portion exhibiting a required bending position while mutually ensuring a required bending radius whereby the cable or the like can be reliably guided and moved. Further, in a mobile position where the adjacent intermediate frames do not need a required bending position, the inserted state of the cable or the like in the chain can be stabilized and held while the upper open end surface formed in the intermediate body of the intermediate frame maintains a straightly extended position.

[0046] Further according to the closed cable drag chain according to claim 2, in addition to the effects obtained by the invention according to claim 1, the sealing degree between the outer frame and the intermediate frame is improved by the fact that an elastic sealed portion, which closely fits the outer frame and the intermediate frame are formed on the inside of the front end and the inside of the rear end of the outer frame. Thus, the diffusion of contact wear powder generated during holding and guiding the cable or the like can be reliably prevented so that one reason of dust generation in an operational environment can be removed. Additionally, when the cable or the like is moved together with a mobile portion of a machine, sliding noises or contact noises, which are likely to occur between the outer frame and the intermediate frame are absorbed, whereby noises in the operational environment can be further decreased.

[0047] Further according to the closed cable drag chain according to claims 3 and 4, in addition to the effects obtained by the invention according to claim 1 or claim 2, sliding resistance is generated in the intermediate frame body and the collision speed of the adjacent intermediate frame bodies are decreased by the fact the outer frame is relatively movably connected to the opening/closing lid member while including an engagement piece, which is movably engaged in an engagement portion protruded on the opening/closing lid member in the coupling direction of the chain. Thus, these collision noises can be reduced. Furthermore, the engagement piece in the outer frame and the engagement portion in the opening/closing lid member are integrally connected to each other. Therefore, even if the upper outer frame and the lower outer frame of the outer frame are opened when the opening/closing lid member is removed from the intermediate frame body, the parts loss of the outer frame and the opening/closing lid member in the intermediate frame can be prevented during maintenance by the integral state of the outer frame and the opening/closing lid member.

[0048] Further according to the closed cable drag chain according to claims 5, 6, 7, and 8 in addition to the effects obtained by the invention according to claims 1 to 4, a generation amount of wear powder generated by the bending slide of the intermediate frame and the outer is reduced by the fact that the intermediate frame and outer frame are formed of a synthetic resin. Further, according to the invention of claims 5, 6, 7, and 8 the col-

lision noises generated between the intermediate frame and the outer frame during movement and hitting noises generated by hitting a moving surface of the cable can be decreased and weight reduction and cost reduction can be realized.

[0049] The invention has been described herein by way of example only and those skilled in the art will readily recognize that changes may be made to the invention as described herein without departing from the spirit and scope of the claims which follow hereinbelow.

Claims

1. A closed cable drag chain into which a cable or the like is inserted to be held and guided in conditions where a number of intermediate frames are articulately connected to each other, an outer frame including a removable opening/closing frame structure fit-covers a coupled portion of the adjacent intermediate frames to close the coupling gaps respectively thereby engaging it in a tubular shape, is **characterized in that**
said intermediate frame comprises an intermediate frame body in which a cable holding groove was provided and an opening/closing lid member fitted into said cable holding groove, and said intermediate frame body includes lower open end surfaces, which abut with each other on the chain bend inner peripheral side to hold a required bending position of the chain and upper open end surfaces, which abut with each other on the chain bend outer peripheral side to hold a straight extended position of the chain.
2. A closed cable drag chain according to claim 1 **characterized in that** elastic sealed portions, which closely fit said outer frame and said intermediate frame, are formed on the inside of the front end and the inside of the rear end of the outer frame.
3. A closed cable drag chain according to claim 1 **characterized in that** said outer frame is relatively movably connected to said opening/closing lid member while including an engagement piece, which is movably engaged in an engagement portion protruded on the opening/closing lid member in the coupling direction of the chain.
4. A closed cable drag chain according to claim 2 **characterized in that** said outer frame is relatively movably connected to said opening/closing lid member while including an engagement piece, which is movably engaged in an engagement portion protruded on the opening/closing lid member in the coupling direction of the chain.
5. A closed cable drag chain according to claim 1

characterized in that said intermediate frame and outer frame are formed of a synthetic resin.

6. A closed cable drag chain according to claim 2 **characterized in that** said intermediate frame and outer frame are formed of a synthetic resin.
7. A closed cable drag chain according to claim 3 **characterized in that** said intermediate frame and outer frame are formed of a synthetic resin.
8. A closed cable drag chain according to claim 4 **characterized in that** said intermediate frame and outer frame are formed of a synthetic resin.

Fig.1

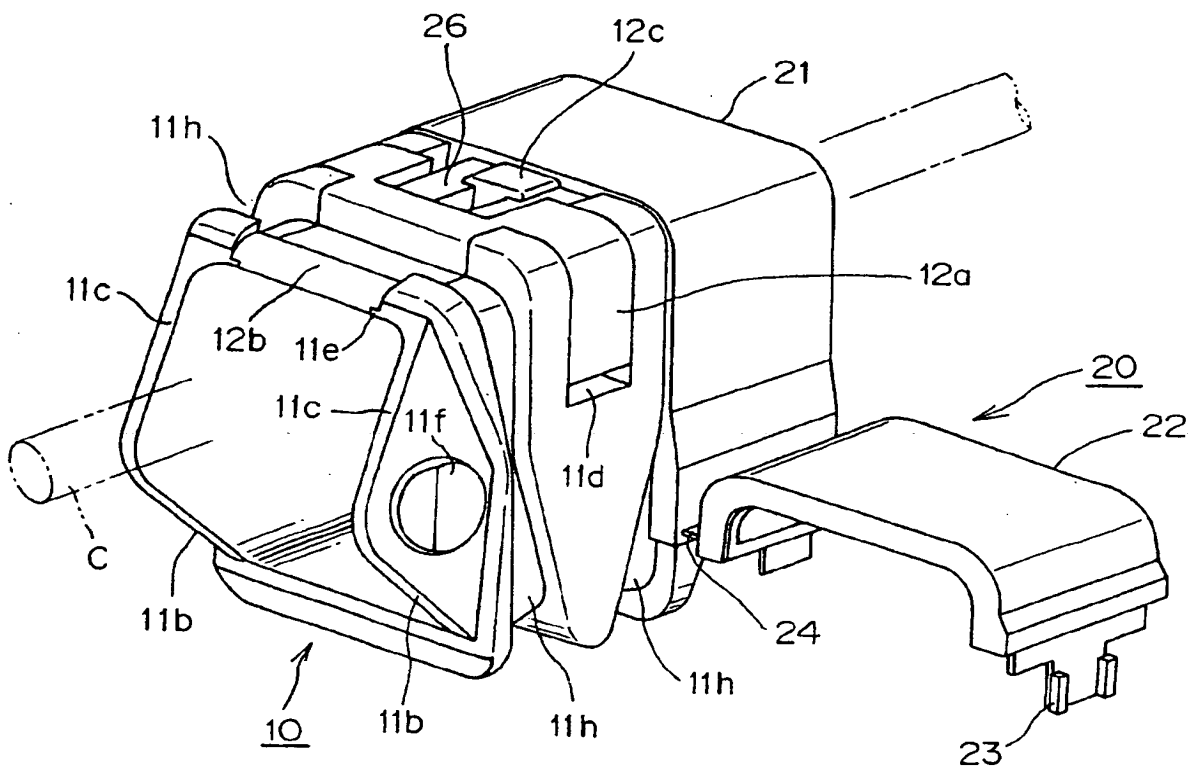
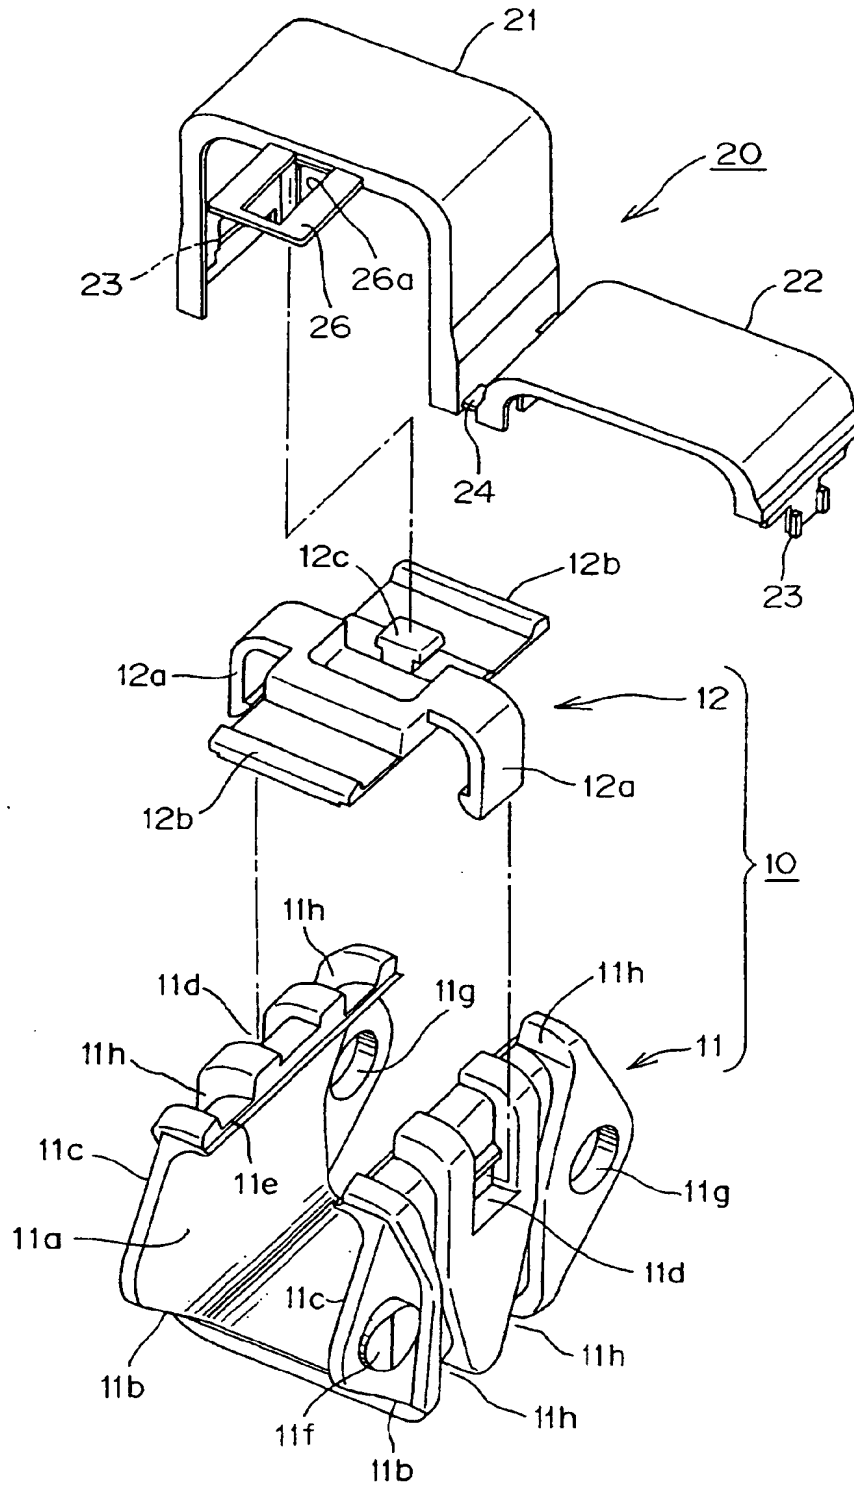


Fig.2



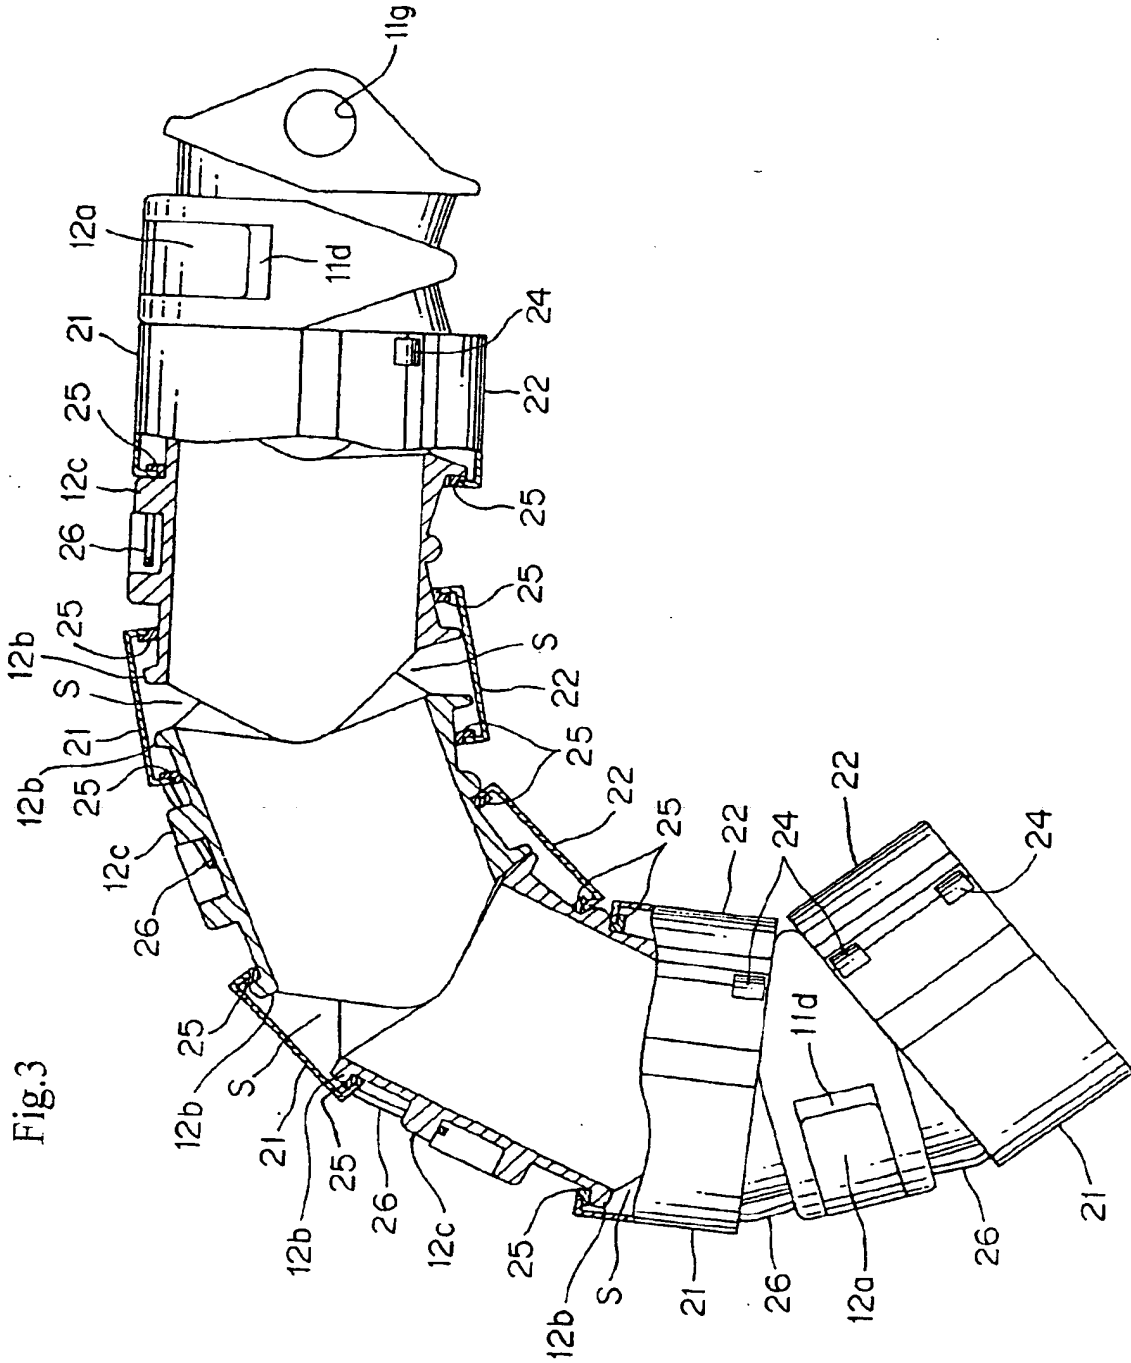


Fig.4
Prior Art

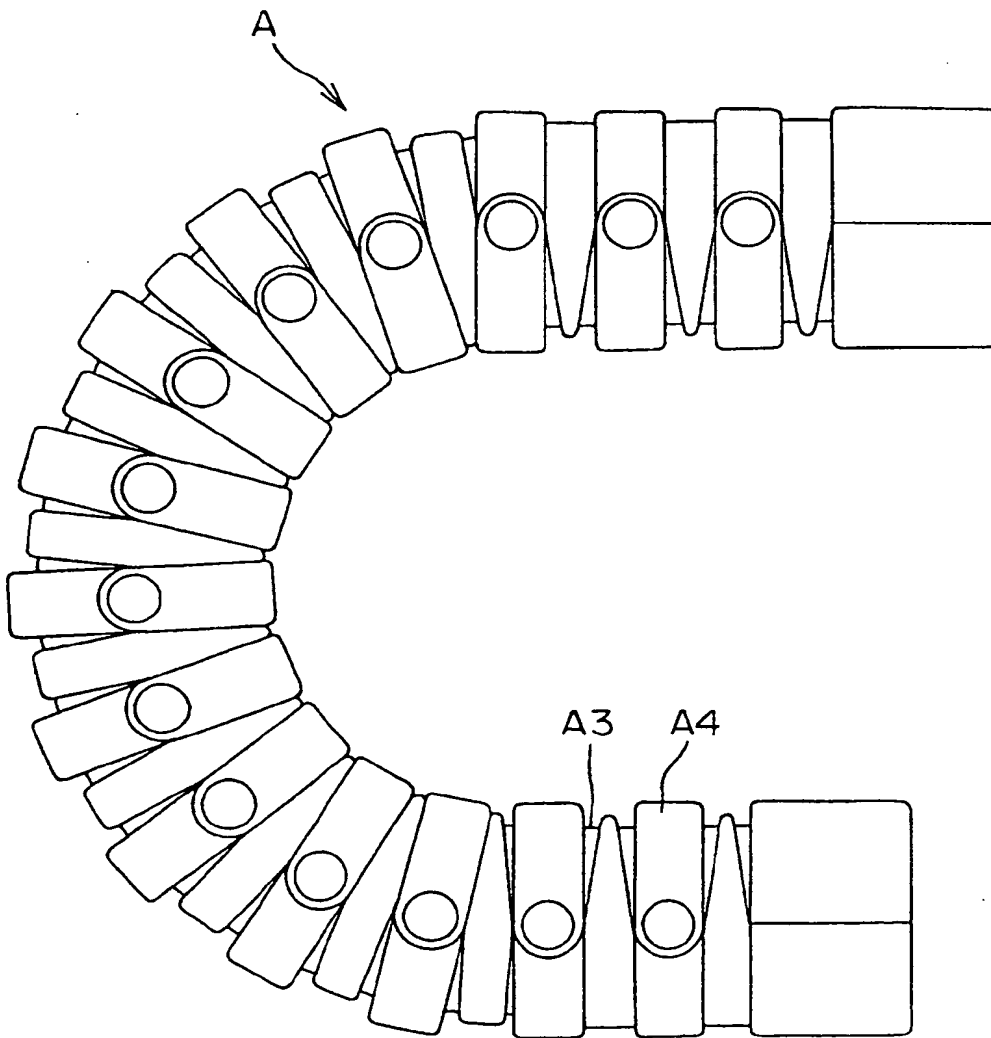


Fig.5(a)
Prior Art



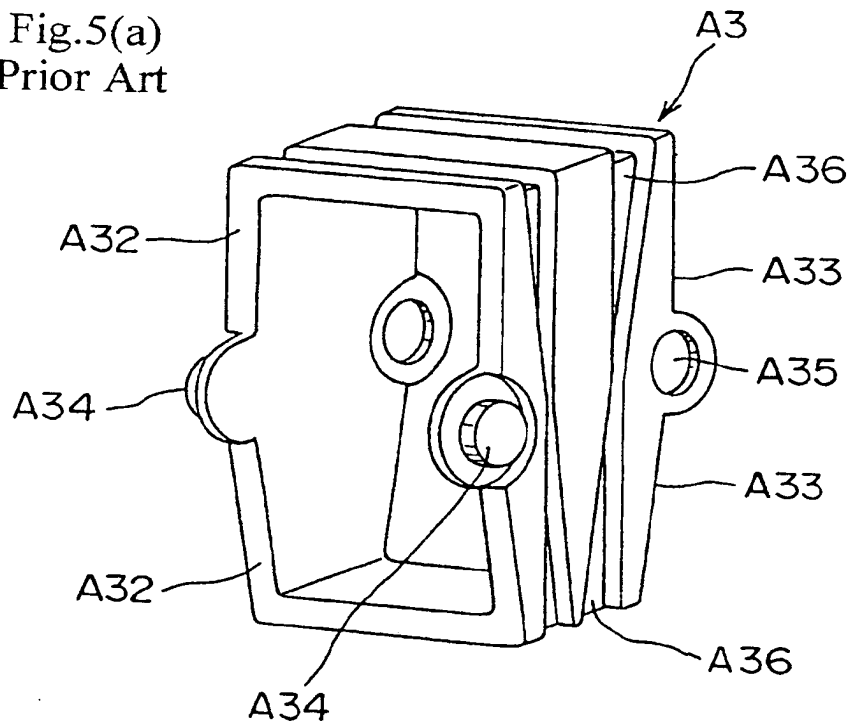


Fig.5(b)
Prior Art



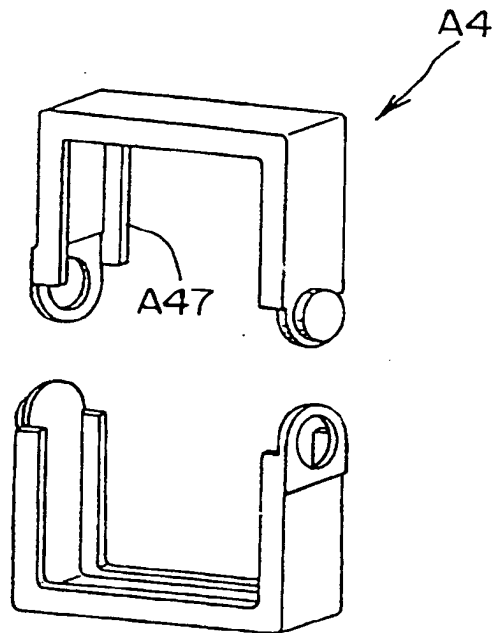

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 319 865 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
23.07.2003 Bulletin 2003/30

(51) Int Cl.7: **F16G 13/16**

(43) Date of publication A2:
18.06.2003 Bulletin 2003/25

(21) Application number: **02025995.8**

(22) Date of filing: **21.11.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Komiya, Shoichiro**
1-61 Shiromi 2-chome, Chuo-ku, Osaka (JP)

(74) Representative: **Maisch, Thomas, Dr. rer. nat.**
Ullrich & Naumann,
Patent- und Rechtsanwälte,
Luisenstrasse 14
69115 Heidelberg (DE)

(30) Priority: **11.12.2001 JP 2001377830**


(71) Applicant: **Tsubakimoto Chain Co.**
Osaka-shi, Osaka (JP)

(54) **Closed cable drag chain**

(57) To provide a closed cable drag chain, which is capable of preventing the contact wear powder generated in holding and guiding the cable or the like from being scattered by reliably closing the cable or the like, and wherein the assembling, maintenance and repair are easy while having light weight and low noise. In a closed cable drag chain into which a cable or the like is inserted to be held and guided in conditions where a number of intermediate frames 10 are articulately connected to each other, an outer frame 20 including a removable opening/closing frame structure fit-covers a

coupling portion of the adjacent intermediate frames 10 to close the coupling gaps S respectively thereby coupling it in a tubular shape, the intermediate frame 10 comprises an intermediate frame body and an opening/closing lid member 12 fitted into the intermediate frame body 11, and the intermediate frame body 11 includes lower open end surfaces 11b, which abut with each other on the chain bend inner peripheral side to hold a required bending position of the chain and upper open end surfaces 11c, which abut with each other on the chain bend outer peripheral side to hold a straight extended position of the chain.

Fig.1

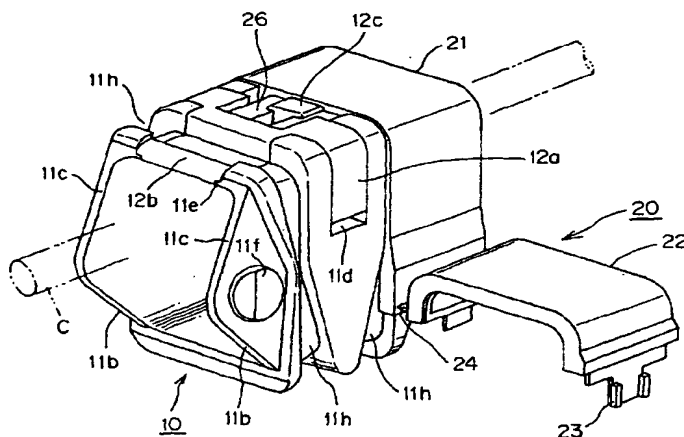



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 02 5995

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	DE 93 18 441 U (SHIH TA FENG) 3 February 1994 (1994-02-03) * figures 1,2 * * page 5, line 7 *	1,2,5,6	F16G13/16
Y	DE 91 09 422 U (SHIH TA FENG) 2 October 1991 (1991-10-02) * figures 1,2,4 * * page 3, line 29 - page 4, line 6 *	1,2,5,6	
Y	US 5 197 767 A (SHIMOMURA YOSHIMASA ET AL) 30 March 1993 (1993-03-30) * column 10, line 19 - line 58 * * figures 16-20 *	2,6	
A	US 4 384 594 A (MORITZ WERNER) 24 May 1983 (1983-05-24) * the whole document *		
A	US 5 839 476 A (BLASE GUENTER) 24 November 1998 (1998-11-24) * the whole document *		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F16G H02G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 June 2003	Examiner Das Neves, N
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P/C/C1)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 02 5995

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-06-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 9318441	U	03-02-1994	DE 9318441 U1	03-02-1994
DE 9109422	U	02-10-1991	DE 9109422 U1	02-10-1991
US 5197767	A	30-03-1993	JP 62188892 A	18-08-1987
			JP 62194092 A	26-08-1987
			JP 1654586 C	13-04-1992
			JP 3018072 B	11-03-1991
			JP 62193743 A	25-08-1987
			JP 1658399 C	21-04-1992
			JP 3023799 B	29-03-1991
			JP 62194093 A	26-08-1987
			JP 1612956 C	30-07-1991
			JP 2037518 B	24-08-1990
			JP 61233282 A	17-10-1986
			JP 1051715 B	06-11-1989
			JP 1566850 C	25-06-1990
			JP 61244986 A	31-10-1986
			DE 3662073 D1	16-03-1989
			EP 0197546 A2	15-10-1986
			US 5069486 A	03-12-1991
			US 5046764 A	10-09-1991
			US 5215338 A	01-06-1993
			US 4739801 A	26-04-1988
US 4384594	A	24-05-1983	DE 3016628 A1	05-11-1981
			AR 226102 A1	31-05-1982
			AT 7531 T	15-06-1984
			AT 2913 T	15-04-1983
			AU 544734 B2	13-06-1985
			AU 6998681 A	05-11-1981
			AU 6998981 A	05-11-1981
			BG 39119 A3	15-04-1986
			BG 39120 A3	15-04-1986
			BR 8102616 A	19-01-1982
			BR 8102617 A	19-01-1982
			CA 1156946 A1	15-11-1983
			CA 1156947 A1	15-11-1983
			CS 220337 B2	25-03-1983
			CS 220780 B2	29-04-1983
			DD 158834 A5	02-02-1983
			DD 158835 A5	02-02-1983
			DE 3160136 D1	05-05-1983
			DE 3163583 D1	20-06-1984
			EP 0038952 A2	04-11-1981
			EP 0038953 A2	04-11-1981

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 02 02 5995

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-06-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4384594 A		ES 267595 Y	01-12-1983
		ES 268052 Y	01-12-1983
		HU 180190 B	28-02-1983
		HU 180191 B	28-02-1983
		JP 1407726 C	27-10-1987
		JP 56159914 A	09-12-1981
		JP 62015008 B	06-04-1987
		JP 56159915 A	09-12-1981
		PL 230844 A1	04-01-1982
		PL 230845 A1	23-12-1981
		PT 72857 A ,B	01-05-1981
		PT 72858 A ,B	01-05-1981
		RO 83447 A1	21-02-1984
		RO 83445 A1	21-02-1984
		SU 1170983 A3	30-07-1985
		YU 98581 A1	30-06-1983
		YU 98681 A1	30-09-1983
		ZA 8102737 A	28-04-1982
		ZA 8102738 A	28-04-1982
US 5839476 A	24-11-1998	DE 4302757 C1	17-03-1994
		BR 9406581 A	02-01-1996
		CA 2155008 A1	18-08-1994
		CZ 9501949 A3	13-12-1995
		WO 9418735 A1	18-08-1994
		DE 59400858 D1	21-11-1996
		EP 0681752 A1	15-11-1995
		ES 2094642 T3	16-01-1997
		HU 72209 A2	28-03-1996
		JP 2756869 B2	25-05-1998
		JP 8505517 T	11-06-1996
		KR 198186 B1	15-06-1999
		PL 310086 A1	27-11-1995
		SK 94195 A3	06-12-1995

EPO FORM P/169

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)